

INSTRUCTIONS FOR USE

You have just purchased an Insect Light Trap FLYinBOX Glue 40/80. FLYinBOX Glue are the best solution for destroying and controlling flying insects. The insects are neutralized by means of glueboard. The FX Glue can be suspended from the ceiling, attached to a wall or quite simply laid on a flat surface. The instructions below explain how to use this product for maximum effectiveness.

WARNING

The units must only be used in areas which are free of dust and possible explosive vapour mixture. Should you have any queries contact your local fire authority for advice before installation. The units are only suitable for indoor use and is not suitable for use in barns, stables and similar locations.



IMPORTANT

This appliance is not designed for used by persons (children included) with diminished physical, sensory or mental capacities or no experience or knowledge, except if they are correctly supervised or if they have been given the instructions on how to use the appliance with complete safety and if they understand the risks involved (A2 / EN 60335-1).

GUARANTEE

Your unit is guaranteed for 5 years (excluding replacement bulbs and glueboards). If a fault occurs, contact your supplier, who will replace your unit providing the product has been operated under normal conditions.


POWER REQUIREMENTS

The units are designed to operate from the following power supply: 230V / 50Hz

Therefore, please ensure that your unit is compatible with the electricity supply in your premises.

INSTALLATION

1. It must be correctly positioned.
2. The model must be suited to the area to be protected.
3. Slide the glue board by the side (after having removed the protective film).
4. Plug in the appliance (230 V/50 Hz) which must imperatively be connected to an electric socket that is earthed.

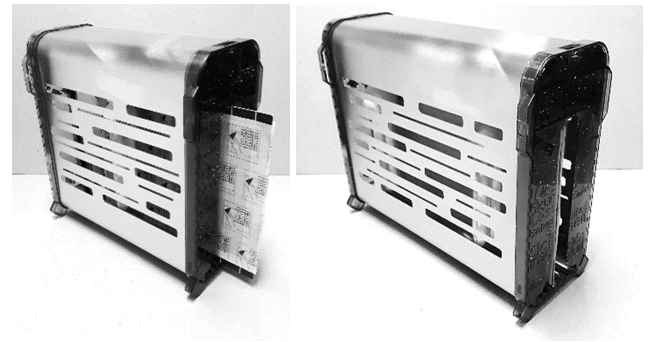

FX40

FX80

POSITIONING

Your unit should ideally be fixed at least two meters above the ground, preferably in the darkest place within the area to be protected, away from windows and skylights, thus avoiding any competition with natural daylight or sunlight.

In large open areas where two or more units are required, siting needs careful consideration to ensure maximum protection. Each unit within a certain area should be centrally positioned.

The positioning of the units varies depending on the location. Should any queries arise on siting please contact your supplier.

SERVICING

Before any form of servicing, ensure that the unit is disconnected from the mains supply. To maintain the units efficiency, replace the UV fluorescent bulbs every 12 months, glue boards must be replaced every 2 months. If any doubts arise regarding these instructions, please contact your supplier.

TECHNICAL CHARACTERISTICS

Model	FLYinBOX Glue 40	FLYinBOX Glue 80
Code	FX40G	FX80G
Wattage	2x20 W (E14)	4x20 W (E14)
Area of application	100 m ²	200 m ²
Consumption	50W max.	100W max.
Power supply	230V / 50 Hz	230V / 50 Hz
Weight	2.4 kg	2.8 kg
Dimensions (cm)	26.5x26.5x12.5	33x26x12.5
Protection class	IP20	IP20

FLYⁱⁿBOX[®] Glue



DESINSECTISEURS FLYinBOX

Les désinsectiseurs constituent la meilleure solution de destruction et de contrôle des insectes volants. La neutralisation des insectes se fait par électrocution. Il peut être suspendu au plafond, accroché au mur ou tout simplement posé sur une surface plane.

Les instructions données ci-après vous expliquent comment utiliser ce désinsectiseur avec une efficacité maximum.

AVERTISSEMENT

Les désinsectiseurs doivent être utilisés uniquement sur des surfaces dépoussiérées et sans mélange de vapeur explosive. Ils doivent être utilisés à l'intérieur et ne conviennent pas à une utilisation dans une grange, une écurie et dans d'autres lieux similaires.

INSTALLATION

Il est nécessaire de remplir certaines conditions d'installation pour vous assurer un contrôle efficace des insectes volants dans vos locaux :


1. Il doit être correctement positionné.
2. Le modèle doit être adapté à la surface à protéger.
3. Il doit fonctionner 24h/24.
4. Les lampes doivent être changées tous les 12 mois.

ALIMENTATION

Les désinsectiseurs FLYinBOX fonctionnent en 230 V – 50 Hz et doivent impérativement être raccordés à une prise électrique reliée à la terre.

CARACTERISTIQUES TECHNIQUES

Model	FLYinBOX Glue 40	FLYinBOX Glue 80
Code	FX40G	FX80G
Puissance	2x20 W (E14)	4x20 W (E14)
Surface application	100 m ²	200 m ²
Consommation	50W max.	100W max.
Alimentation	230V / 50 Hz	230V / 50 Hz
Poids	2.4 kg	2.8 kg
Dimensions (cm)	26.5x26.5x12.5	33x26x12.5
Indice de protection	IP20	IP20



FX40



FX80

EMPLACEMENT

Il convient de fixer le désinsectiseur FLYinBOX au moins à 2 mètres du sol, de préférence dans l'endroit le plus sombre de la surface à protéger, loin des fenêtres et de l'éclairage, donc en évitant la lumière naturelle et l'exposition au soleil. Dans de grands espaces ouverts, l'appareil doit être installé en position centrale.

Le montage mural se fera à l'aide d'équipements adaptés (chevilles, vis,...) au poids de l'appareil. L'appareil devra être fixé au mur au niveau des encoches prévues à cet effet sur les flancs en plastique.

Le montage au plafond se fera à l'aide d'équipements adaptés (chaînettes) au poids de l'appareil. La chaînette sera fixée au niveau des pattes prévues à cet effet sur le haut de l'appareil.

Les applications varient selon leur emplacement. Si vous avez des questions au sujet de l'emplacement, contactez votre fournisseur.

GARANTIE

Le désinsectiseur FLYinBOX est garanti 5 ans dans les conditions normales d'utilisation (à l'exclusion des lampes).

IMPORTANT

Cet appareil peut être utilisé par des enfants âgés d'au moins 8 ans et des personnes ayant des capacités physiques, sensorielles ou mentales réduites ou dénuées d'expérience ou de connaissance, s'il (si elles) sont correctement surveillé(e)s ou si des instructions relatives à l'utilisation de l'appareil en toute sécurité leur ont été données et si les risques encourus ont été appréhendés..

Les enfants ne doivent pas jouer avec l'appareil. Le nettoyage et l'entretien par l'utilisateur ne doivent pas être effectués par des enfants sans surveillance.

